


IR Port Test:


	<p>Using a Clie handheld Palm OS Personal Digital Assistant (PDA), open the Q330 1.47t (if using Baler14) or 1.49t (if using Baler44)</p>
	<p>Tap 'Status' with stylus.</p>
	<p>On header menu options select 'App/Settings.'</p>
	<p>Check 'Use IR Port.'</p> <p>Tap 'Return' with stylus</p>



Select the 'General' option in Status menu.

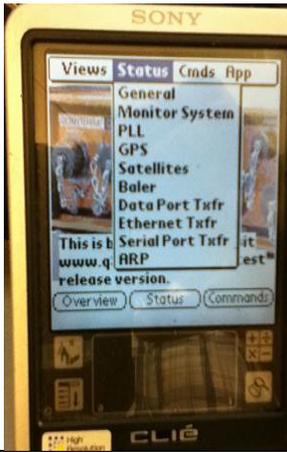

Hold Clie near IR port to within 10 inches.

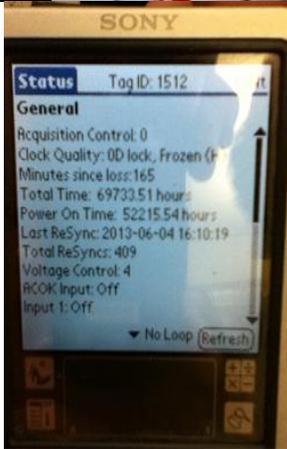

Successful IR port communication with Q330.

Tag ID will show serial number of current Q330 you are working with and everything on the general status screen. If nothing else shows; you may have an IR problem, so, try same Clie on other Q330's to confirm its not the Clie itself. Also, try other Clies on the Q330 with no communication.

Attempts to communicate will stop at 20.